



# GMAX

TOOLS  
CREATE MORE

正阳科技股份有限公司  
ZHENGYANG TECHNOLOGY CO., LTD  
浙江省金华市永康市经济开发区长城东大道558号  
No. 558 Great Wall East Road, Economic Development  
Zone, Yongkang, Jinhua, Zhejiang, China  
Hotline **400 181 6599**



鸽牌微信公众号



鸽牌天猫旗舰店



鸽牌抖音视频号





**40v** GMAX 2.0Ah

**40v** GMAX 4.0Ah

**高功率**  
HIGH POWER

**耐久性**  
DURABILITY

**数字化**  
DIGITALIZATION

鸽牌40VGMAX是一个全新的锂电平台, 具有独特的工具电池和充电器。创新的工具设计和高输出的电池相结合, 为高需求的工业用户提供了真正的解决方案。

Pigeon 40VGMAX is a new lithium battery platform with a unique tool battery and charger. The combination of innovative tool design and high-output batteries provides a real solution for high-demand industrial users.

**40v** LITHION  
**GMAX**

# 40VGMAX 锂电池系列

## 40V LITHIUM BATTERY SERIES

### 坚固耐用 STRONG & DURABLE

特别为40VGMAX锂电池设计的高耐用性结构

High durability structure specially designed for 40VGMAX lithium batteries



**Shock absorption structure 减震结构**  
Strong shell and battery rack  
坚固的外壳和电池架  
Create extra space to absorb impact  
创造额外吸收冲击力的空间

- 1 六插脚鱼尾插片设计** 可过大电流, 让工具更高能 The six-foot fishtail insert is designed to have too much current, making the tool more efficient.
- 2 高强度电池滑轨** 耐高温, 让更电池恒久耐用 High-strength battery slide Durable sliding rail, which can firmly connect batteries and tools, is more suitable for high-load work.
- 3 LED电量指示** 提供更加清晰的充电状态指示 4 LED battery capacity indicators



#### 产品技术参数 PRODUCT SPECIFICATIONS

|                              | 40v 2.0Ah   | 40v 4.0Ah   |
|------------------------------|-------------|-------------|
| 额定电压 Rated voltage           | 40V         | 40V         |
| 电池容量 Battery capacity        | 2.0Ah       | 4.0Ah       |
| 电芯类型 Cell type               | 18650       | 21700       |
| 电芯数量 Number of battery cells | 10节         | 10节         |
| 电池包尺寸 Battery size           | 70x82x121mm | 78x87x136mm |
| 电池包重量 Battery weight         | 0.68kg      | 0.96kg      |

# 40VGMAX POWER SUPPLY SYSTEM

## 40VGMAX供电系统

### 40V CHARGER


### 充电器

#### 安全性能


符合GB 4706.1-2005、GB 4706.18-2014的要求。  
充电器的工作温度范围为10-50°C, 工作湿度≤90%RH。

#### SAFETY PERFORMANCE

Meets the requirements of GB4706.1-2005 and GB4706.18-2014.  
The operating temperature range of the charger is 10-50°C,  
and the working humidity is less than or equal to 90% RH.

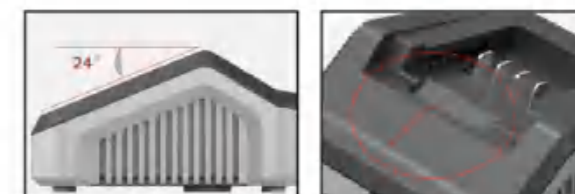

- 24°倾斜角设计, 倾斜角的设计使用起来更加省力。  
24° inclination angle design, The design of the inclination angle is more labor-saving to use.
- 插拔语卡扣面更短, 在取出上部分电池时更加符合人机工程学。  
Plugging and unplugging card buckle surface is shorter, It is more ergonomic when removing the upper part of the battery.
- 内置冷却风扇, 充电时通过空气循环对充电中的锂电池降温, 以此大幅缩短充电所需时间。  
Built in cooling fan, which cools the lithium battery during charging through air circulation, significantly reducing the charging time.

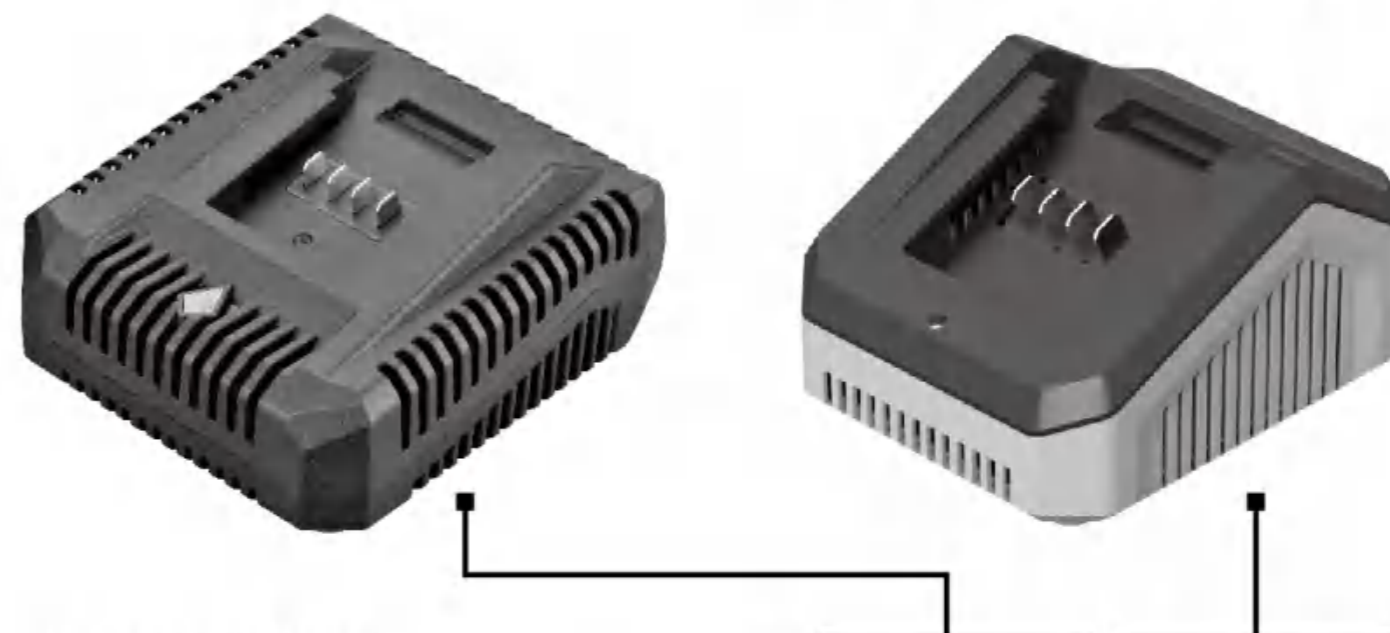

#### 产品技术参数 PRODUCT SPECIFICATIONS

|             |                        | 2.0                       | 4.0                       |
|-------------|------------------------|---------------------------|---------------------------|
| 输入电源电压 (AC) | Input Supply Voltage   | 220-240V                  | 220-240V                  |
| 充电电流        | Charging Current       | 2.0A                      | 4.0A                      |
| 输入电源频率      | Input Supply Frequency | 50-60Hz                   | 50-60Hz                   |
| 输出功率        | Output Power           | 80W                       | 160W                      |
| 绝缘等级        | Insulation Grade       | 双重绝缘<br>Double Insulation | 双重绝缘<br>Double Insulation |



**1000W**

**BOASTS COMPARABLE POWER TO A 1000W AC ANGLE GRINDER**

拥有可与1000W交流角磨相媲美的功率

**GL681** ANGLE GRINDER **充电式角磨**

适用于：切割 / 打磨 / 抛光  
Applicable to: Cutting / Grinding / Polishing

**产品技术参数** PRODUCT SPECIFICATIONS **40V<sup>GMAX</sup> 2.0Ah 标配**  
**4.0Ah 推荐**

|                          |           |
|--------------------------|-----------|
| 砂轮直径 Wheel Diameter      | φ 100mm   |
| 主轴螺纹 Spindle Thread      | M10       |
| 空载转速 No-load Speed       | 8500r/min |
| 砂轮内孔 Wheel Bore Diameter | 16mm      |
| 裸机重量 Net Weight          | 1.45kg    |



**工作量** WORK CAPACITY

约**31**刀 扁钢规格: 8mm (厚) X40mm (宽)  
使用40VGMAX电池1块 切割扁钢 **40V<sup>GMAX</sup> 2.0Ah**  
Using 40VGMAX battery, a piece of cutting flat steel can cut 31 pieces  
Flat steel specifications: 8mm (thick) X40mm (width)

- 断电防护** Power-off Protection  
非正常断电情况下重新通电时，机器不运转保护操作者  
When the power is turned on again under abnormal power failure, the machine does not operate to protect the operator.
- 过载防护** Overload Protection  
超过安全限值时，机器自动停止运行防止意外  
When the safety limit is exceeded, the machine automatically stops running to prevent accidents.
- 防反冲防护** Anti-recoil Protection  
在切割片卡住时，防止机器回弹造成意外  
when the cutting film is stuck, prevent accidents caused by machine rebound.
- 堵转防护** Stall Protection  
切割遇到障碍物后，电机制动，以防爆片造成意外  
After the cutting encounters strong resistance, motor braking, accident caused by explosion-proof film.
- 软启动** Soft Start  
电机转速平滑加速，不窜速  
The motor accelerates smoothly without speeding up.

**产品细节** PRODUCT DETAILS

- 1 三位辅助手柄** Auxiliary Handle
- 2 滑动开关** Slide Switch
- 3 无刷电机** Brushless Motor
- 4 易握手柄** Slender Handle
- 5 保护罩** Guard
- 6 可拆卸防尘网** Removable Dust Guard
- 7 40VGMAX锂电池** Battery



**55.5mm** Max Cutting Depth  
最大切深

## POWERFUL CUTTING

木工专用 整板一刀切


**GL691** MINI CIRCULAR SAW **充电式电圆锯**

适用于：房屋立模、家具制作、室内装修  
Suitable for: house molding, furniture making, interior decoration

**产品技术参数** PRODUCT SPECIFICATIONS **40V<sup>GMAX</sup> 2.0Ah 标配**  
**4.0Ah 推荐**

|                     |           |
|---------------------|-----------|
| 锯片直径 Blade Diameter | φ 150mm   |
| 空载转速 No-load Speed  | 6300r/min |
| 裸机重量 Net Weight     | 1.85kg    |

**55.5mm** 0-90° 最大切割深度 **36mm** 45° 切割深度

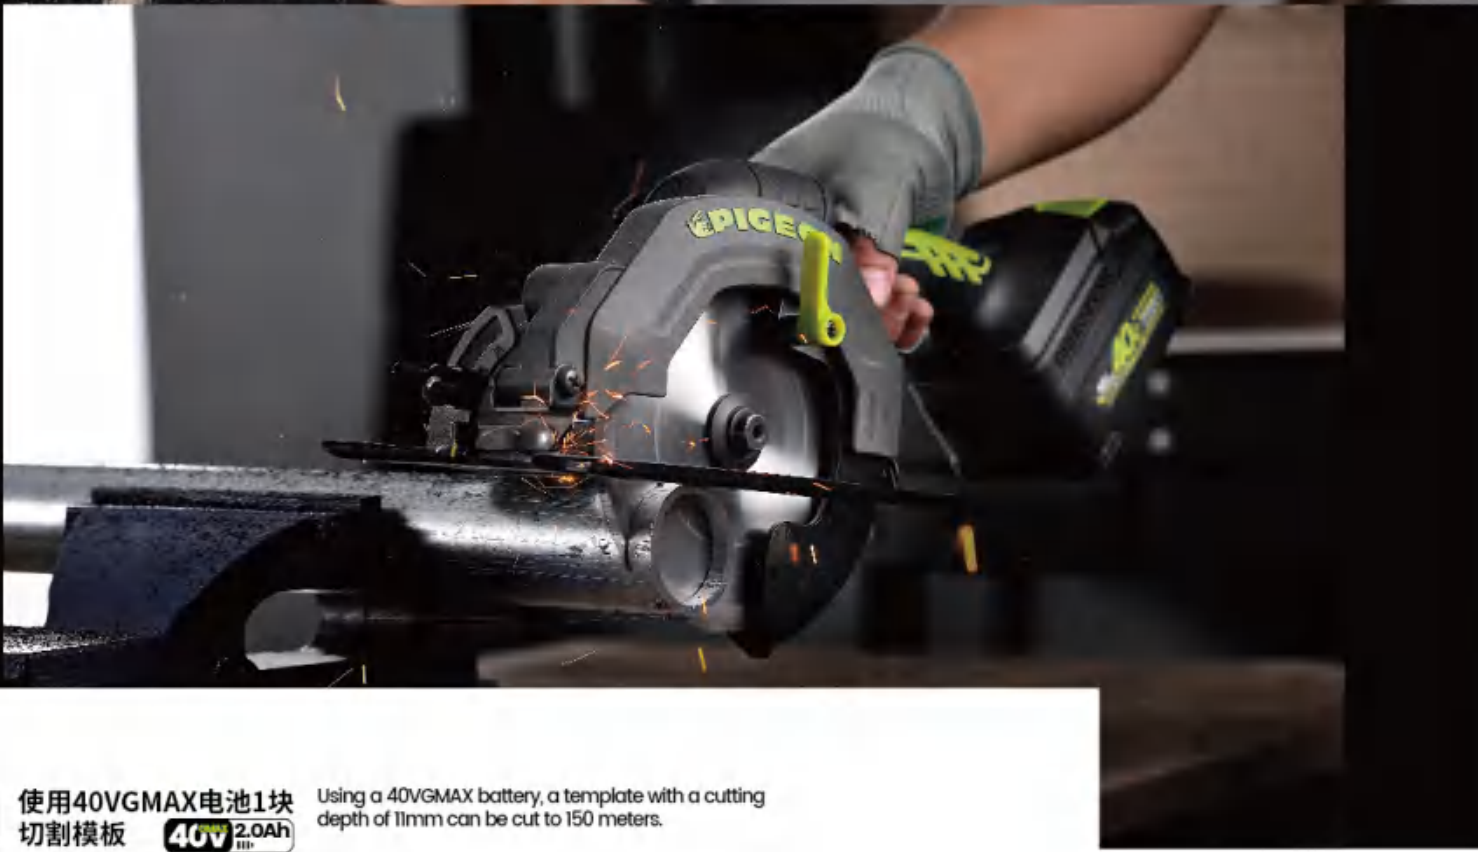

### 工作量 WORK CAPACITY

约 **150米** 模板规格: 11mm(厚)

使用40VGMAX电池1块 切割模板 **40V<sup>GMAX</sup> 2.0Ah**  
Using a 40VGMAX battery, a template with a cutting depth of 11mm can be cut to 150 meters.

约 **30%** 效率提升

相比市面同级产品效率显著提升  
testing conditions: 122cm X 1.8m template  
Compared with the market, the efficiency is significantly improved by 30%

测试工况:  
122cm X 1.8cm 模板

### 产品细节

PRODUCT DETAILS



- |                                       |                                  |
|---------------------------------------|----------------------------------|
| <b>1</b> 角度调节旋钮 Angle Adjustment Knob | <b>5</b> 纤细的易握手柄 Slender Handle  |
| <b>2</b> 出尘口 Dust Outlet              | <b>6</b> 40VGMAX电池 Battery       |
| <b>3</b> 无刷电机 Brushless Motor         | <b>7</b> 动护罩 Dynamic Shield      |
| <b>4</b> 安全保护开关 Safety Switch         | <b>8</b> 精钢底板 Steel Bottom Plate |



**30**N.m

## DRILLING POWERHOUSE, EFFORTLESSLY CONVENIENT

—  
钻孔利器, 轻松便捷

**GL686**

SINGLE SPEED  
RIGHT ANGLE DRILL

充电式单速角钻

产品技术参数

PRODUCT  
SPECIFICATIONS

**40V<sup>GMAX</sup>** 4.0Ah  
标配

|                        |                    |
|------------------------|--------------------|
| 空载转速 No-load Speed     | 1200r/min          |
| 夹持能力 Gripping Capacity | 1.5-13mm           |
| 产品尺寸 Product Size      | 425.5x194.5x91.5mm |

### CAPACITIES

|           |                       |                |
|-----------|-----------------------|----------------|
| 金属 / 麻花钻  | Steel / Twist Bit     | 5/16", 8mm     |
| 木头 / 支罗钻  | wood / Auger Bit      | 1-1/2", 38.1mm |
| 木头 / 船支罗钻 | wood / Ship Auger Bit | 1-1/2", 38.1mm |
| 木头 / 沉孔钻  | wood / Selffeed Bit   | 2", 50.8mm     |
| 木头 / 孔锯   | wood / Hole Saw       | 4", 101.6mm    |



工作量 WORK  
CAPACITY

约 **105** 孔  
松木板规格:  
50mm (厚) 松木板

使用40VGMAX电池1块  
钻孔 **40V 4.0Ah**

Using a 40VGMAX battery, a single speed drilling  
50mm pine board can drill 105 holes

产品细节

PRODUCT  
DETAILS

|         |                   |             |           |
|---------|-------------------|-------------|-----------|
| 1 平稳手柄  | Front Handle      | 4 40VGMAX电池 | Battery   |
| 2 正反转开关 | Reversible Switch | 5 钻夹头       | Chuck Key |
| 3 软握柄   | Soft Grip         | 6 LED灯      | Led       |



**90**N.m

**POWERFUL, PORTABLE, PRECISE, AND VERSATILE DRILLING SOLUTION**

强力、便携、精准、多功能的钻孔解决方案

**GL687** TWO-SPEED ANGLE DRILL **充电式双速角钻**

**产品技术参数** PRODUCT SPECIFICATIONS

**40V<sup>GMAX</sup> 4.0Ah** 标配

|                        |                 |
|------------------------|-----------------|
| 高档转速 High Speed        | 1350/min        |
| 低档转速 Low Speed         | 450/min         |
| 夹持能力 Gripping Capacity | 1.5-13mm        |
| 产品尺寸 Product Size      | 586.5x363x192mm |

| CAPACITIES                   |  | High 高速        | Low 低速         |
|------------------------------|--|----------------|----------------|
| 金属 / 麻花钻 Steel / Wist Bit    |  | 5/16", 8mm     | 1/2", 13mm     |
| 木头 / 支罗钻 wood / Auger Bit    |  | 1-1/2", 38.1mm | 1-1/2", 38.1mm |
| 木头 / 沉孔钻 wood / Selffeed Bit |  | 2", 50.8mm     | 2-9/16", 65mm  |
| 木头 / 孔锯 wood / Hole Saw      |  | 4", 101.6mm    | 6", 152.4mm    |



- 1 平稳手柄 Front Handle
- 2 正反转开关 Reversible Switch
- 3 软握柄 Soft Grip
- 4 40VGMAX电池 Battery
- 5 钻夹头 Keyed Chuck
- 6 双速调节旋钮 Two-speed adjustment knob
- 7 LED灯 Led

**工作量** WORK CAPACITY

**HIGH** 高速模式 **约93孔** 松木板规格: 50mm(厚)松木板

**LOW** 低速模式 **约103孔** 松木板规格: 50mm(厚)松木板

使用40VGMAX电池1块双速钻孔 **40V 4.0Ah**  
Using a 40VGMAX battery, a two-speed drilling 50mm pine board can drill 103 holes in low speed mode and about 93 holes in high speed mode

**产品细节** PRODUCT DETAILS



## 套丝头 THREADING DIE HEADS

适用多种规格管道操作

Suitable for a variety of diameter pipes for convenient operation



**1/2"** **3/4"** **1"** **1-1/4"**

## 产品细节

PRODUCT DETAILS

**MBC**

## HIGH-EFFICIENCY THREAD PROCESSING FOR PRECISE CONNECTIONS

—  
高效螺纹加工, 精准连接

**GL471** PIPE THREADER

充电式套丝机

产品技术参数 PRODUCT SPECIFICATIONS

**40V<sup>GMAX</sup>** 4.0Ah 标配

|                    |              |
|--------------------|--------------|
| 输出转速 No-load Speed | ±30rpm       |
| 产品尺寸 Product Size  | 690x162x92mm |
| 裸机重量 Net Weight    | 7kg          |



|              |                     |
|--------------|---------------------|
| <b>1</b> 套丝头 | Threading Die Heads |
| <b>2</b> 提手  | Handle              |
| <b>3</b> 开关  | Switch              |

|                    |                 |
|--------------------|-----------------|
| <b>4</b> 软握柄       | Soft Grip       |
| <b>5</b> 40VGMAX电池 | Battery         |
| <b>6</b> 压钳支架      | Threading Clamp |



## EASY TO UNSCREW, COMPACT AND PORTABLE

拧卸轻松 随身便携

**350 N.m** 最大正转扭矩  
Maximum forward torque

**500 N.m** 最大破拆扭矩  
Maximum dismantling torque



**GL870** IMPACT WRENCH

充电式电扳

产品技术参数 PRODUCT SPECIFICATIONS

**40V<sup>GMAX</sup>** 2.0Ah 标配  
4.0Ah 推荐

|      |                  |                      |
|------|------------------|----------------------|
| 电机类型 | Motor Type       | 无刷电机 Brushless Motor |
| 标准螺栓 | Standard bolt    | M14                  |
| 空载转速 | No-load Speed    | 0-1400/0-2200r/min   |
| 冲击频率 | Impact Frequency | 0-3600/min           |
| 产品尺寸 | Product Size     | 145x80x205mm         |

**12.7 (1/2")** 方榫尺寸  
Square tenon size

**HL 2** 扭力档位数  
Number of torque gears

**12 mm** 螺钉  
Screw specifications

**1.05 KG** 裸机重量  
Net weight

## POWERFUL, MORE EFFICIENT DISMANTLING WORK

大劲头 拧卸作业更高效

**800 N.m** 最大正转扭矩  
Maximum forward torque

**1300 N.m** 最大破拆扭矩  
Maximum dismantling torque



**GL871** IMPACT WRENCH

充电式电扳

产品技术参数 PRODUCT SPECIFICATIONS

**40V<sup>GMAX</sup>** 2.0Ah 标配  
4.0Ah 推荐

|      |                  |                      |
|------|------------------|----------------------|
| 电机类型 | Motor Type       | 无刷电机 Brushless Motor |
| 标准螺栓 | Standard bolt    | M24                  |
| 空载转速 | No-load Speed    | 0-1300/0-1800r/min   |
| 冲击频率 | Impact Frequency | 0-2500/min           |
| 产品尺寸 | Product Size     | 250x85x245mm         |

**19 (3/4")** 方榫尺寸  
Square tenon size

**HL 2** 扭力档位数  
Number of torque gears

**24 mm** 螺钉  
Screw specifications

**2.4 KG** 裸机重量  
Net weight

## COMPACT APPEARANCE, STRONG AND EFFICIENT CORE

小锂电 大作为

**40** N.m 最大扭矩  
Maximum forward torque



**GL670**

ELECTRIC  
DRILL

充电式电钻

产品技术参数

PRODUCT  
SPECIFICATIONS

**40V<sup>GMAX</sup>** 2.0Ah 标配  
4.0Ah 推荐

|                   |                      |
|-------------------|----------------------|
| 电机类型 Motor Type   | 无刷电机 Brushless Motor |
| 高档转速 High speed   | 0-1600rpm            |
| 低档转速 Low speed    | 0-400rpm             |
| 产品尺寸 Product Size | 165x76x210mm         |

**∅10** mm 最大夹持  
Maximum clamping

**20+1** 档 扭力调节  
Maximum dismantling torque

**0.75** KG 裸机重量  
Net weight

## DUAL SPEED SWITCHING, VERSATILE HAMMER DRILL

劲猛双速 锤钻自如

**180** N.m 最大扭矩  
Maximum forward torque



**GL672**

ELECTRIC  
IMPACT DRILL

充电式冲击电钻

产品技术参数

PRODUCT  
SPECIFICATIONS

**40V<sup>GMAX</sup>** 2.0Ah 标配  
4.0Ah 推荐

|                       |                      |
|-----------------------|----------------------|
| 电机类型 Motor Type       | 无刷电机 Brushless Motor |
| 高档转速 High Speed       | 0-2000rpm            |
| 低档转速 Low Speed        | 0-500rpm             |
| 冲击频率 Impact Frequency | 0-32000bpm           |
| 产品尺寸 Product Size     | 200x76x225mm         |

**∅13** mm 最大夹持  
Maximum clamping

**20+1** 档 扭力调节  
Maximum dismantling torque

**1.68** KG 裸机重量  
Net weight

## SMOOTH AND EFFICIENT EDGE TRIMMING WITH PRECISE CARVING

修边平整 精工出细活



**GL570-S**

ROUTER

充电式电木铣

产品技术参数 PRODUCT SPECIFICATIONS

电机类型 Motor Type

无刷电机 Brushless Motor

空载转速 No-load Speed

10000-30000r/min

机器尺寸 Product Size

245x115x230mm

**0-40** mm 铣削深度  
Milling Depth Range

**6-8** mm 夹头尺寸  
Chuck Size

**6** 档 档位调节  
Gear Adjustment

**2.24** KG 裸机重量  
Net weight

**40V<sup>GMAX</sup>** 2.0Ah 标配  
4.0Ah 推荐

## A GREAT HELPER FOR FINE WOOD WORKING

精细利器 不差毫厘



**GL570-D**

TRIM  
ROUTER

充电式修边机

产品技术参数 PRODUCT SPECIFICATIONS

电机类型 Motor Type

无刷电机 Brushless Motor

空载转速 No-load Speed

10000-30000r/min

机器尺寸 Product Size

126x90x188mm

**0-25** mm 铣削深度  
Milling Depth Range

**6-8** mm 夹头尺寸  
Chuck Size

**6** 档 档位调节  
Gear Adjustment

**1.28** KG 裸机重量  
Net weight

**40V<sup>GMAX</sup>** 2.0Ah 标配  
4.0Ah 推荐

## EFFICIENT HOLE DIGGING AND RECHARGEABLE OPERATION

—  
钻洞高效 无绳束缚



**GL170**

EARTH  
AUGER

充电式地钻

产品技术参数 PRODUCT SPECIFICATIONS

**40V<sup>GMAX</sup>** 2.0Ah 标配  
4.0Ah 推荐

电机类型 Motor Type

无刷电机 Brushless Motor

空载转速 No-load Speed

125r/min

裸机尺寸 Bare Machine Size

350x193x296mm

**∅150-800** mm 粘土孔径  
Clay drilling diameter

**30-35** 粘土打孔数量  
Quantity of clay drilling holes

**2.8** KG 裸机重量  
Net weight

## FAST MIXING SPEED, SUIT- ABLE FOR MORE OPERATING ENVIRONMENTS

—  
搅拌省力 高效无忧



**GL276**

MIXING  
DRILL

充电式搅拌钻

产品技术参数 PRODUCT SPECIFICATIONS

**40V<sup>GMAX</sup>** 2.0Ah 标配  
4.0Ah 推荐

电机类型 Motor Type

无刷电机 Brushless Motor

空载转速 No-load Speed

750r/min

裸机尺寸 Bare Machine Size

350x193x276mm

**∅140** mm 搅拌杆  
Mixing Rod Range

**M14** 螺纹连接  
Threaded Connection

**2.8** KG 裸机重量  
Net Weight

## HIGH POWER PROVIDES EFFICIENT POWER FOR DREDGING

功率大疏通更高效



**GL470**

SNAKE DRAIN CLEANER

充电式管道疏通器

产品技术参数

PRODUCT SPECIFICATIONS

**40V<sup>GMAX</sup>** 2.0Ah 标配  
4.0Ah 推荐

|                       |               |
|-----------------------|---------------|
| 电机类型 Motor Type       | 直流电机 DC Motor |
| 总长 Total Length       | 25Ft (7.62m)  |
| 有效长度 Effective Length | 23Ft (7m)     |
| 空载转速 No-load Speed    | 0-560rpm      |
| 产品尺寸 Product Size     | 350x160x275mm |

Ø2 mm 线径  
Blade Diameter

Ø6.6 mm 外径  
Blade Diameter

3/4"-2" 疏通能力  
Clearing ability

3.38 KG 裸机重量  
Net weight

## EFFICIENT AND PRECISE CUTTING TOOLS SUITABLE FOR VARIOUS CUTTING NEEDS

高效精准 切割多能

**60x120 mm** 切割能力  
Cutting Ability 0°x90°

**35x80 mm** 切割能力  
Cutting Ability 45°x45°



**GL571**

MITER SAW

充电式锯铝机

产品技术参数

PRODUCT SPECIFICATIONS

**40V<sup>GMAX</sup>** 2.0Ah 标配  
4.0Ah 推荐

|  |                      |
|--|----------------------|
| 电机类型 Motor Type                          | 无刷电机 Brushless Motor |
| 斜角切割范围 Diagonal cutting range            | 左45°-右45°            |
| 锯片倾斜范围 Range of inclination of saw blade | 0-左45°               |
| 空载转速 No-load Speed                       | 4200rpm              |
| 产品尺寸 Product Size                        | 414.5x412x285mm      |

Ø210 mm 锯片直径  
Blade Diameter

6.43 KG 裸机重量  
Net weight

## PRECISION CUTTING THE CUTTING TABLE IS LARGER

精密切割 更大台面

10"



**GL572** TABLE SAW

充电式台锯

产品技术参数 PRODUCT SPECIFICATIONS

**40V<sup>GMAX</sup>** 2.0Ah 标配  
4.0Ah 推荐

电机类型 Motor Type 无刷电机 Brushless Motor

空载转速 No-load Speed **3600rpm**

台面尺寸 Table Size **565x591mm**

**Ø254 mm** 锯片直径  
Blade Diameter

**80 mm** 切割能力  
Cutting Ability **90°**

**58 mm** 切割能力  
Cutting Ability **45°**

## PORTABLE CUTTING WITH HIGH PRECISION THE CUTTING TABLE CAN BE EXTENDED

便携精准 台面可延伸

8" **610 mm** 最大延伸切割宽度  
Maximum extended cutting width



**GL573** TABLE SAW

充电式台锯

产品技术参数 PRODUCT SPECIFICATIONS

**40V<sup>GMAX</sup>** 2.0Ah 标配  
4.0Ah 推荐

电机类型 Motor Type 无刷电机 Brushless Motor

空载转速 No-load Speed **4800rpm**

台面尺寸 Table Size **621.5x500mm**

**Ø216 mm** 锯片直径  
Blade Diameter

**70 mm** 切割能力  
Cutting Ability **90°**

**49.5 mm** 切割能力  
Cutting Ability **45°**

**40V** GMAX 2.0Ah 标配  
4.0Ah 推荐



## STRONG DOUBLE-SIDED HANDS MAKE WORK EASIER

强劲双面手 锤钻更轻松

**方柄** 钻头  
Square handle  
drill bit



**GL270**

ELECTRIC  
HAMMER

充电式双功能电锤

产品技术参数 PRODUCT  
SPECIFICATIONS

**40V** GMAX 2.0Ah 标配  
4.0Ah 推荐

电机类型 Motor Type

无刷电机 Brushless Motor

空载转速 No-load Speed

950rpm

冲击频率 Impact Frequency

4600/min

产品尺寸 Product Size

390x98x246mm

**4**KG 裸机重量  
Net  
weight

**安心充**

13A 新型原装充电器,  
快速安全为您持久蓄力。



# 16V Li-ion SERIES



**GL642** RECHARGEABLE ELECTRIC DRILL 充电式电钻

**产品技术参数** PRODUCT SPECIFICATIONS **16V 2.0Ah**

|                    |                     |
|--------------------|---------------------|
| 电机类型 Motor Type    | 无刷电机                |
| 空转速度 No-load Speed | 0-450 / 0-1800r/min |
| 夹头尺寸 Chuck Size    | 10mm                |

**50 N.m** 最大扭矩  
Maximum forward torque



**GL643** RECHARGEABLE SCREWDRIVER 充电式螺丝批

**产品技术参数** PRODUCT SPECIFICATIONS **16V 2.0Ah**

|                           |                     |
|---------------------------|---------------------|
| 电机类型 Motor Type           | 无刷电机                |
| 空转速度 No-load Speed        | 0-450 / 0-1800r/min |
| 六角批头 Hexagonal Batch Head | 柄径对边 6.35mm         |

**50 N.m** 最大扭矩  
Maximum forward torque



**GL645** RECHARGEABLE MULTI FUNCTIONAL SHOVEL 充电式多功能铲

**产品技术参数** PRODUCT SPECIFICATIONS **16V 2.0Ah**

|                        |                  |
|------------------------|------------------|
| 电机类型 Motor Type        | 无刷电机             |
| 定子参数 Stator Parameters | 0.74 x 12        |
| 空转速度 No-load Speed     | 10000-20000r/min |
| 偏心角度 Eccentric Angle   | 3.5°             |